



Damcos®

Data sheet

**Digital indicator
type PR 5515**

Advantages:

- Digital indicator with watertight front, IP 65.
- 4 digit LCD display, with green back light for easy and accurate reading.
- Sensor error detection.
- Programmable via PC.
- Scaling via function keys in front.
- Current/voltage or temperature input.
- Custom linearity of input signal.


Description:

The digital indicator, type PR 5515 is a sturdy, multipurpose indicator for panel mounting, designed especially for industrial and marine applications.

The 4 digit backlit LCD display offers easy and accurate reading.

With the front operated keys the display read-outs can be scaled and decimals set.

The indicator is galvanically separated which means that both grounded and floating signals can be measured.

Resistance input with automatic cable compensation for 3 and 4 wire sensor connection.

Display indication of sensor error - signal out of range.

Application, e.g.:


Display of:

- Tank level and contents.
- Speed of rotating parts.
- Temperatures.

Specifications:

Specification range:	@ -20°C to +60°C
Dimensions (HxWxD):	48 x 96 x 120 mm
Panel cut-out:	44.5 x 91.5 mm
Supply voltage:	115 V AC, 230 V AC, or 24 V AC/DC
Input examples:	
PT 100	-200°C - +850°C
Ni 100	-60°C - +250°C
NiCr-Ni	-180°C - +1372°C
Voltage input	0 - 250V DC
Current input	0/4 - 20 mA DC
Internal consumption:	< 1.5 W
Display:	4 digit LCD display with green back light, 16 mm high. Updated 2.5/sec.
Indication range:	-9999 to +9999 selectable decimals
Linearity:	Custom linearity 2 - 7 points
Accuracy:	± 0.2% of indication range of standard applications
Programming: the	By the PC, or with the front operated keys display read-outs are scaled and decimal points set . Linearity only by the PC
Output:	Auxiliary supply 20 v DC/20 mA for supply of 2-wire transmitter
Option:	Relay output (PR 5514)

Data sheet Digital indicator type PR 5515

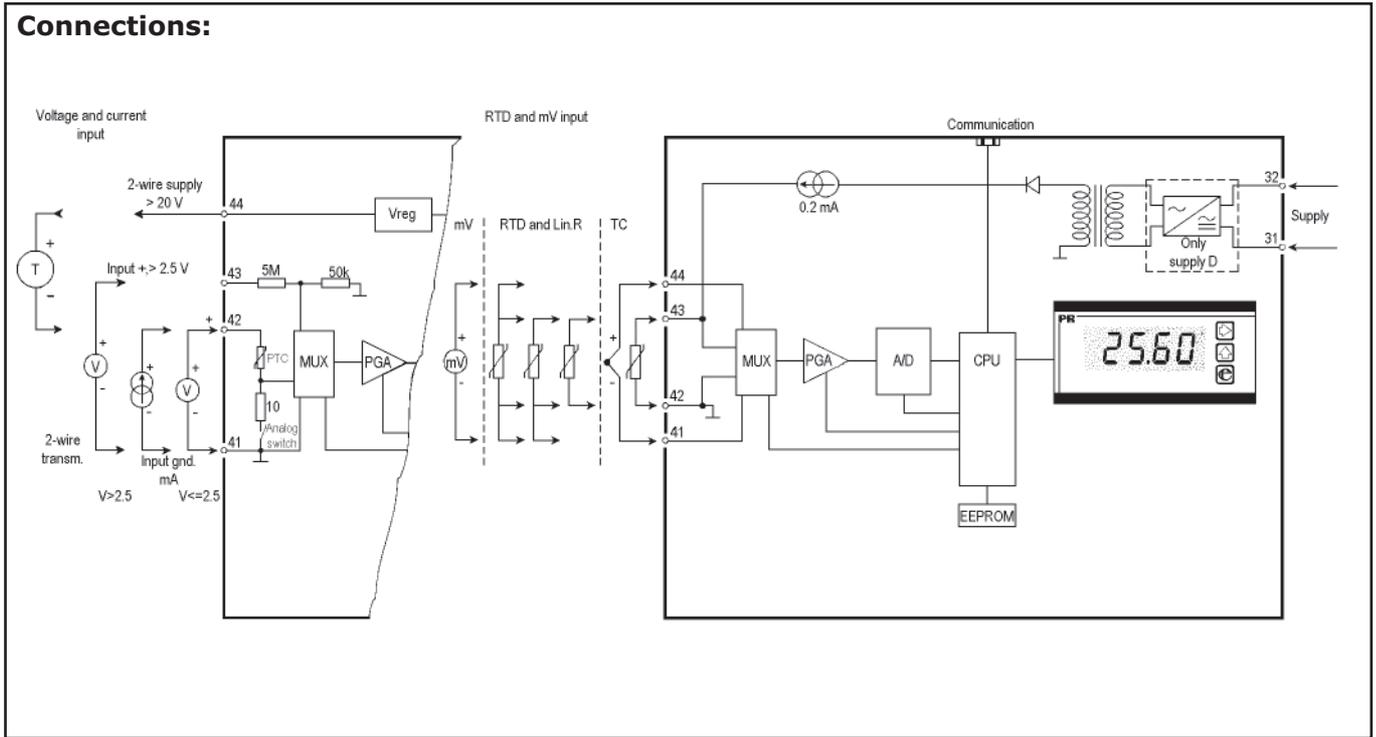

Damcos can accept no responsibility for possible errors in catalogues, brochures and other printed material. Damcos reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Damcos and the Damcos logotype are trademarks of Damcos A/S. All rights reserved.